




Robustex Electric Production Drilling Equipment Ind. And Trade Co. Ltd.
Robustex Elektrik İmalat Sondaj Ekipmanları Sanayi Ve Tic. Ltd. Şti.



MOUNTING DETAILS | MONTAJ DETAYLARI

Galvanized Ceiling Type Mounting Kit (Included) / Tavan Montaj takımı dahildir.

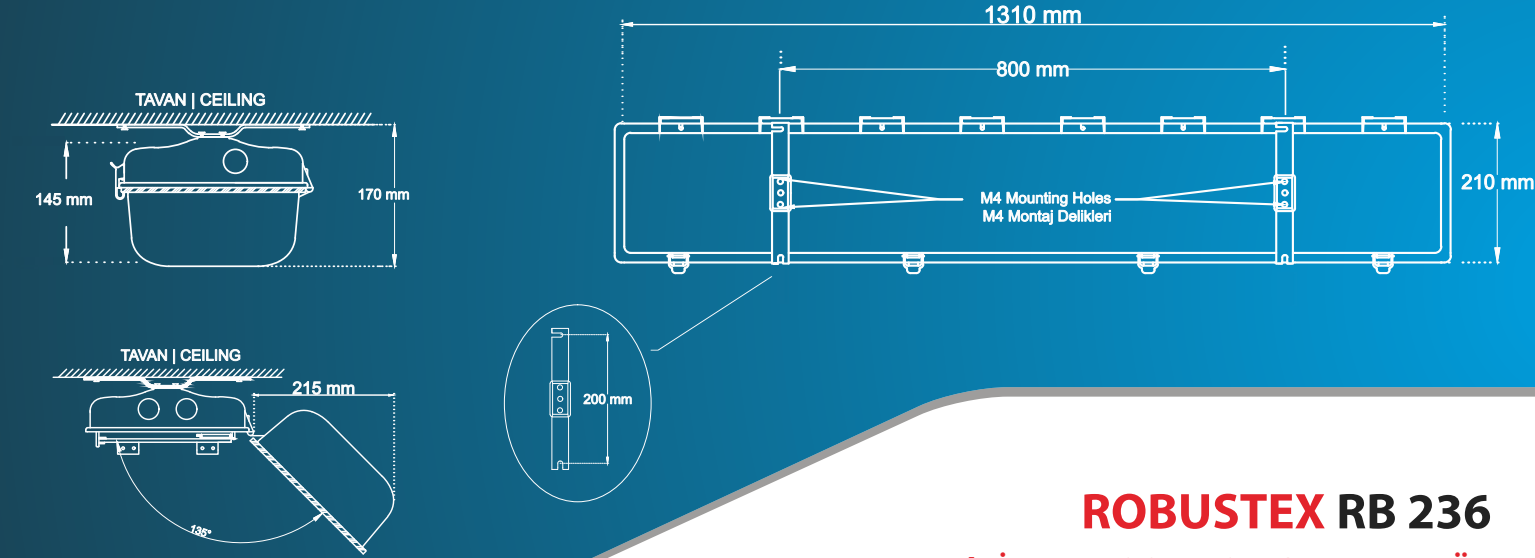

ROBUSTEX RB 236

2x36 W Ex-ed TİP EX-PROOF FLORESAN ARMATÜR
2x36 W Ex-ed TYPE EX-PROOF FLUORESCENT LUMINAIRE

MATERIALS / MALZEME CİNSİ

- ENCLOSURE / GÖVDE: Polyester
- DIFFUSER / DİFÜZÖR: Polycarbonate (UV transperant) / UV' ye karşı dayanıklı polikarbonat
- GASKET / CONTA TÜRÜ: EPDM gasket / EPDM conta

TECHNICAL FEATURES / TEKNİK ÖZELLİKLER

- INTENDED USE / KULLANIM ALANLARI: Zone-1 / Zone-21 / Zone-2 / Zone-22
- APPROVALS / SERTİFİKA BİLGİSİ: ExVeritas 16 ATEX 0181 X
- ATEX MARKING / ATEX KODU: II 2G Ex e d mb IIC T4 gb
- IECEx CONFORMATION / IECEx STANDART BİLGİSİ : IECEx EXV 16.0010X
- AMBIENT TEMPERATURE RANGE / UYGUN ORTAM SICAKLIĞI (Tamb) : -20°C To +55°C / -20°C ile +55°C aralığında
- IP RATING / IP DERECEŚİ : IP 65
- ENTRIES / KABLO GİRİŞLERİ: 3x M25
- CABLE GLANDS/KABLO RAKORLARI :
2x M25 x1,5mm polyester cable glands,
1x M25x1,5mm polyester plug / 2x M25x1,5mm polyester kablo rakoru,
1x M25x1,5mm polyester kör tapa
- LAMPS / AMPUL CİNSİ: 2x36 Watt, T8 fluorescent lamp / 2x36 Watt T8 floresan lamba
- LAMP HOLDER / Duy: G 13
- BALLAST / BALAST: High frequency electronic ballast conforming with / Yüksek frekanslı elektronik balast.
Uygunlukları ;
-EN 60079-0 -EN 60079-7 -EN 60079-18
- RATED VOLTAGE / NÖMİNAL GERİLİMİ : 220 – 240 V
- FREQUENCY / ÇALIŞMA FREKANSI : 50/60 Hz
- POWER FACTOR / GÜÇ FAKTÖRÜ : > 0,95

OTHER SPECIFICATIONS / DİĞER ÖZELLİKLER

-
-

-

